




# MARPOL LL4F 808-SB

Linear Low Density Polyethylene - Butene

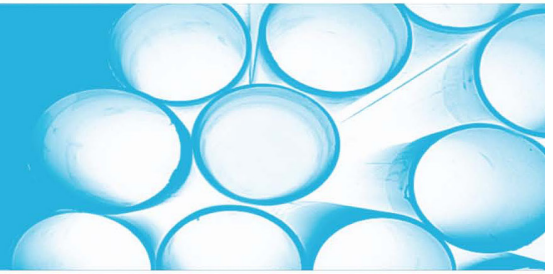

# PRODUCT DATA SHEET

PROPERTY	VALUE	ASTM
Melt Index (190°C/ 2.16kg) (g/10 min)	.80	D 1238
Density (g/cm <sup>3</sup> )	0.921	D 792
Dart Drop Impact (g)	110	D 1709A
Tear Strength (g/mil.)	MD 100 TD 400	D 1922
Tensile Strength (psi)	MD 6500 TD 4800	D 882
Yield Strength (psi)	MD 1400 TD 1600	D 882
Elongation (%)	MD 610 TD 870	D 882
1% Secant Modulus (psi)	MD 30500 TD 33000	D 882
Haze (%)	12	D 1003
Gloss @ 45°	57	D & ( ) +

**Additives:** Medium Slip and Antiblock

**Recommended Applications:** Industrial packaging, heavy duty sacks, general purpose packaging and bags needing moderate clarity.

This information, to our knowledge, is believed to be correct. The use of this product in its actual conditions are beyond our control and satisfactory results for this product is the customer's sole responsibility.