




MARPOL
LL4M 885
Linear Low Density Polyethylene

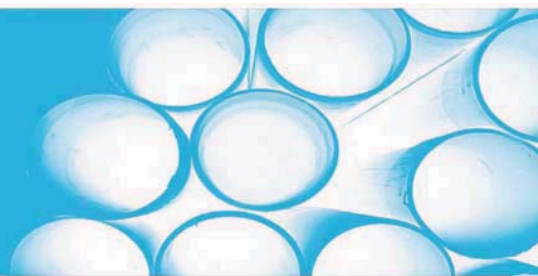

PRODUCT DATA SHEET

PROPERTY	VALUE	ASTM
Melt Index (dg/min)	85	D 1238
Density (g/cm³)	0.928	D 792

Description: This resin exhibits excellent flow for high speed injection molding applications while providing good tear resistance and ESCR.

Additives: No Slip, No Antiblock

Industry Standards: Complies with U.S. FDA 21 CFR 177.1520(c) 3.1a and European Commission Regulation (EU) No 10/2011

This information, to our knowledge, is believed to be correct. The use of this product in its actual conditions are beyond our control and satisfactory results for this product is the customer's sole responsibility.