




**MARPOL**  
**PSC 6200**  
General Purpose Polystyrene

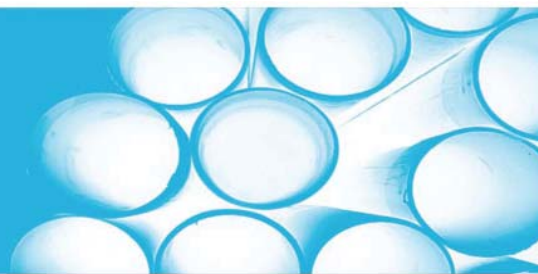

**PRODUCT DATA SHEET**

PROPERTY	VALUE	ASTM
Melt Index (g/10 min)	20	D 1238
Vicat Softening °C	96	D 1525
HDT (Unannealed) °C	78	D 648
Tensile Strength (MPa)	44	D 638
Elongation (%)	2.0	D 638
Flexural Strength (MPa)	73	D 790
Flexural Modulus (MPa)	3000	D 790

Processing: Extrusion and Molding

Applications: Blended with HIPS for hangers, toys, novelty items and DMC applications. Also used for co-extrusion of glossy cap layer on HIPS sheets and as a carrier for masterbatch compounding.

MARPOL® PSC 6200 can - in principle - be used in food contact applications in the USA (FDA) and in Canada (HBP). Migration or use limitations may apply.

This information, to our knowledge, is believed to be correct. The use of this product in its actual conditions are beyond our control and satisfactory results for this product is the customer's sole responsibility.